

PRODUCT FAMILY DATASHEET

FLOODLIGHT PHOTOCELL SENSOR 135

Luminaire with symmetrical light distribution with 135 W and daylight sensor



AREAS OF APPLICATION

- Replacement for floodlights with halogen lamps
- Garages
- Public areas
- Building facades
- Construction areas
- D-sign according to EN 60598-2-24 for fire-risk commercial unit, f. e. by accumulation of dust

PRODUCT BENEFITS

- Automatically switches on and off according to available daylight thanks to photocell light sensor
- Energy savings of up to 90 % compared to halogen lamp floodlights
- Frosted cover made of tempered glass for uniform illumination
- Optimized weight and size due to compact design
- 3 years guarantee

PRODUCT FEATURES

- Automatically switches on below 35 lux and off above 95 lux ambient light
- Luminaire efficacy: up to 110 lm/W
- Symmetrical beam angle: 100° x 100°
- Mounting bracket for up to 180° tilting
- Type of protection: IP65
- Impact resistance: IK08 (IK07 Photocell sensor)
- Ambient temperature in operation: -20...+50 °C



- Connection via 1 m cable, wiring required

TECHNICAL DATA


Product description	Electrical data			Luminaire control gear data				Photometrical data
	Nominal wattage	Nominal voltage	Mains frequency	Output current	Max. no. of lum. on circuit break. B16 A	Max. no. of lum. on circuit break. C10 A	Max. no. of lum. on circuit break. C16 A	Luminous flux
FLOODLIGHT SL 135 W 4000 K IP65 BK ¹⁾	135.00 W	220...240 V	50/60 Hz	790 mA	10	8	13	15000 lm

Product description	Light color (designation)	Color rendering index Ra	Light technical data	Luminaire sensor data	Dimensions & weight				Colors & materials	
			Beam angle	Type of sensor	Length	Width	Height	Product weight	Body material	Product color
FLOODLIGHT SL 135 W 4000 K IP65 BK ¹⁾	Cool White	≥80	100 ° x 100 °	Light	300.0 mm	270.0 mm	76.0 mm	3900.00 g	Aluminum	Black


Product description	Cover material	Temperatures & operating conditions	Lifespan			Capabilities	
		Ambient temperature range	Lifespan L70/B50 at 25 °C	Lifespan L80/B10 at 25 °C	Lifespan L90/B10 at 25 °C	Adjustable	Dimmable
FLOODLIGHT SL 135 W 4000 K IP65 BK ¹⁾	Tempered glass	-20...+50 °C	50000 h	30000 h	15000 h	Yes	No

Product description	Type of connection	Certificates & standards		
		Protection class	Type of protection	Luminaire with limited surface temperature, class "D"
FLOODLIGHT SL 135 W 4000 K IP65 BK ¹⁾	Cable, 3-pole	I	IP65	Yes

¹⁾ Available from July 2019

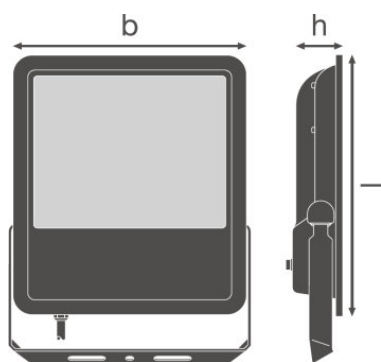

FLOODLIGHT SL 135 W 4000 K IP65 BK

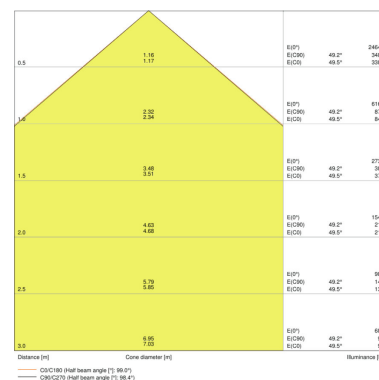

FLOODLIGHT SL 135 W 4000 K IP65 BK

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075216785	Shipping carton box 1	386 mm x 306 mm x 133 mm	4427.00 g	15.71 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

REFERENCES / LINKS

For Guarantee see
www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.